

ANALOGUE SERIES

DESKTOP PAGING MICROPHONE | **PM1000**

6 CH DESKTOP PAGING MICROPHONE | **PM1060**

12 CH DESKTOP PAGING MICROPHONE | **PM1120**

PM1000 analogue series are available in three variants and had been serving many installations faithfully since its creation. They are available as simple paging mic with chime to those with 6 or 12 zone selections. They are most suitable for simple and small size installations of less than 12 zones in total.

FEATURES :

- Condenser gooseneck microphone with illuminated ring
- Pre and post announcement 4 tone chime
- Adjustable chime and mic volume with balance mic / line output level
- Output level selection to mic or line signal to suit the input type of the pre-amplifier mixer
- Dry contact available when mic is active (PM1000 only)
- 6 or 12 zone selection for PM1060 and PM1120

TECHNICAL SPECIFICATIONS :

	PM1000	PM1060	PM1120
Power requirement	24V DC adaptor	24V DC via D9 conn.	
Power consumption	50 mA	150 mA	150 mA
Zone selection	ALL CALL	6 and 12 zones w ALL CALL	
Microphone	Condenser microphone cardioid		
Output impedance	600 Ohm		
Output level	1.2 V (line output) / balanced mic (775 mV)		
Output dry contact	3 A normally open		
Output controls	Chime and mic level		
Audio connection	1/4 " stereo phone jack		
Switching connection	-	D15 connector	
Operating distance	300 m (recommended)		
Chime	4 tone up and 4 tone down		
Indicators	Mic ring, zone switch, ALL CALL		
Frequency response	100 ~ 12 KHz (+/- 3dB ; 0 dB out)		
S/N ratio	> 60 dB		
Gooseneck mic length	400 mm		
Dimensions (WxHxD)	150 x 62 x 186 mm (excluding mic)		
Weight (kg)	800 gms	800 gms	850 gms



PM1000





PM1060




PM1120

APPLICATION SCHEMATIC :

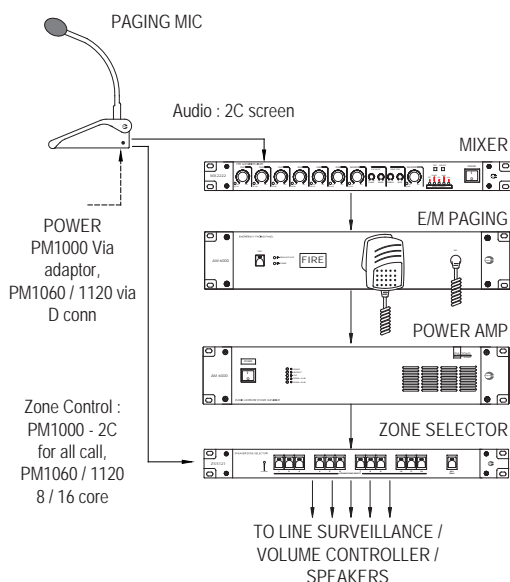

Rear View Of PM1000



Rear View Of PM1060 / PM1120

Packing information

- Qty per carton : 1 unit
- W x H x D : 512 x 83 x 288 mm
- Weight : PM 1000 - 1.5 kg (incl adaptor)
- : PM 1060 - 1.15 kg
- : PM 1120 - 1.2 kg